




### Reduce friction, reach extended depths and higher deviations without the need for costly services

Impact Selector's Slickline Roller Bogie® tools enable slickline operations to be performed more quickly and easily. Operators can perform the work using the same equipment without changing wireline operating procedures resulting in time savings with less risk. This is the most efficient conveyance system available.

Used in most wellbore conditions, up to 87° deviation Slickline Roller Bogie® tools can be installed at any point in the tool string.

With independent swivels, the self-orienting roller body ensures the rollers are at all times oriented to the low side of the tubing. The tool string is lifted onto large, highly-efficient rollers, eliminating contact friction and enabling easier and deeper wellbore access. Running weight remains positive and steady, pick-up weight is greatly reduced and the risk of wire breakage is lowered; jarring can be precise and more effective.

Slickline Roller Bogie® tools are available in a wide range of sizes to pass through all wellbore restrictions and can be ordered with a choice of connection types to suit individual tool string requirements.

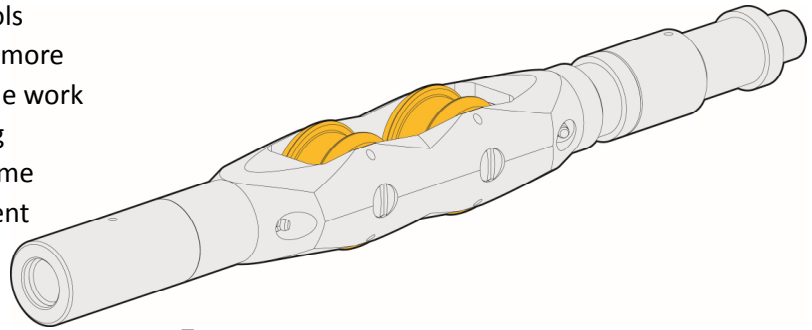


#### Features:

- Self-orienting design
- Low friction dual rollers
- Streamlined profile
- Robust and durable tool design
- Low maintenance requirements
- Available for all tubing sizes

#### Benefits:

- Reach extended depths and higher deviations without need for costly services such as coiled tubing or wireline tractors.
- Lower pick up weight means reduced wire loading.
- More effective and visible jarring at greater depth or higher deviation due to efficient transfer of mass.
- Maintain completion integrity by protecting coated and high-chrome tubulars.
- Improve data quality by eliminating “slip-stick” and achieving more constant logging speeds.

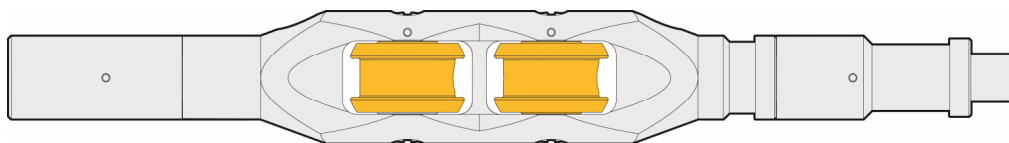


For more information please contact  
Customer Service at 1-800-238-9239 24 hours a day / 7 days a week  
Email: [impact@impactselector.com](mailto:impact@impactselector.com)






# Roller Bogie® – Slickline

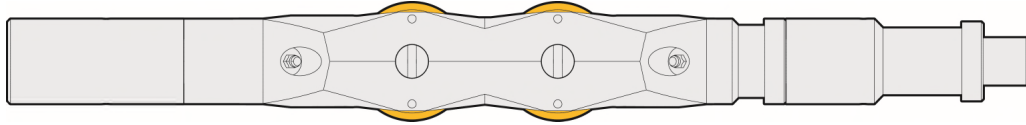

Specifications						
Roller Bogie® Size (inches)	*Weight (lbs)	*Length (inches)	Tubing Nominal Size (inches)	**Max Tool String OD Conveyed (inches)	Service Type	Connection Type
1.600	7	20	2.375	1.375	Composite rollers available for running in GRE or High Chrome Tubing	Standard, Sour or Severe Sour Service available
1.800	10	21	2.875	1.563		
1.900	9	21	2.875	1.688		
1.950	9	19	2.875	1.688		
2.125	10	19	2.875	1.750		
2.200	10	19	2.875	1.875		
2.275	11	20	2.875	1.938		
2.400	11	20	3.500	2.000		
2.500	16	21	3.500	2.125		
2.600	17	21	3.500	2.250		
2.770	18	20	3.500	2.375		
3.000	20	22	4.500	2.500		
3.350	26	21	4.500	2.875		
3.600	29	22	4.500	3.125		
3.700	35	24	4.500	3.250		
3.850	37	25	4.500	3.500		
4.100	39	25	5.000	3.625		
4.900	50	25	7.000	4.375		
5.500	55	26	7.000	5.000		

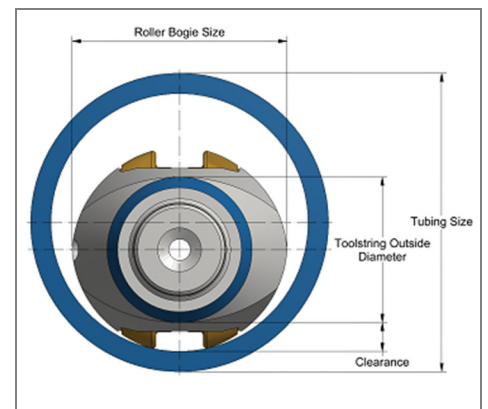

## Applications

- Tubing drift and sampling
- Scale and debris removal
- Plug setting and retrieval
- SSD manipulation
- Kickover tool deployment
- Memory logging and perforating
- Fishing
- Tubing re-entry

\*Tool weights and lengths are average values per Roller Bogie® size.

\*\*Recommended maximum tool OD that can be conveyed using a particular Roller Bogie® size.

For more information please contact  
Customer Service at 1-800-238-9239 24 hours a day / 7 days a week  
Email: [impact@impactselector.com](mailto:impact@impactselector.com)

